


Image not found or type unknown

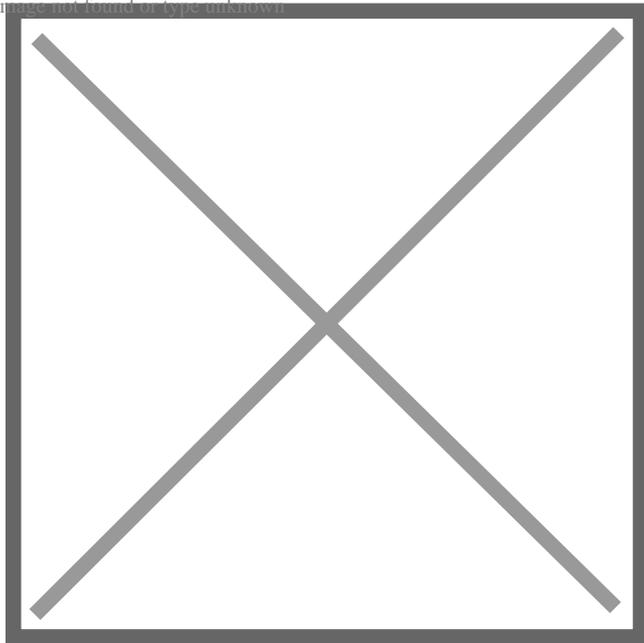


Dimensions	
------------	--

Product dimensions (mm)	ø650 x 80
-------------------------	-----------

Scheme	
--------	--

Scheme	
--------	--



Product	
---------	--

Real power (W)	74
----------------	----

Real luminous flux (Lm)	6415
-------------------------	------

Luminous efficiency (Lm/W)	86,7
----------------------------	------

Beam angle (°)	115
----------------	-----

Life time (h)	60000 (L80B10)
---------------	----------------

IP	20
----	----

IK	04
----	----

Electrical class insulation	Class 1
-----------------------------	---------

Photobiological risk	0 - Exempt
----------------------	------------

Operating temperature	from 5° C to 30° C
-----------------------	--------------------

Electrical feeding	220..240V, 50/60Hz
--------------------	--------------------

Colour	White
--------	-------

Energy efficiency class	A
-------------------------	---

Diffuser	PMMA opal diffuser
----------	--------------------

Control gear	
--------------	--

Control gear included	Yes
-----------------------	-----

Control gear	Electronic Control Gear
--------------	-------------------------

Factor de potencia	95
--------------------	----

Light source	
--------------	--

Light source included	Yes
-----------------------	-----

Light source	Led
--------------	-----

Nominal power (W)	71
-------------------	----

Nominal luminous flux (Lm)	8912
----------------------------	------

Average life time (h)	60000
-----------------------	-------

Colour temperature (K)	4000
------------------------	------

Colour consistency (SDCM)	2
---------------------------	---

CRI	80
-----	----

Modern architectural luminaire designed with pure aesthetic circular lines from the Artshape Troll family.

DESCRIPTION

Modern architectural luminaire designed with pure aesthetic circular lines from the Artshape Troll family. Luminaire has been designed to be mounted on the ceiling surface or suspended. It build-in highly efficient LED light sources. Luminaire offers various options of luminous flux and colour temperature are available under request. Artshape allow achieve a unique arrangement of various premises and are thought to be used in spaces with high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. Body is made of thin-walled aluminium profile finish in white. However other different finishes are possible according to RAL colour range. Emitting Surface is made of material with very good light diffusion parameters. Luminaire sets a 71 W LED source with CRI higher than 85 % and a chromatic dispersion lower than 2 SMCD. Fixture has a luminous flux of 6415 Lm, with an efficiency of 86,7 Lm/W and a total consumption of 74 W. The average life for the luminaire is 60000 (L80B10) h (established at a minimum flux of 70 % from the original). Luminaire built-in an auxiliary gear on/off fed at 220-240V; 50/60 Hz.

Item code	0SRSPÉ90W219Z
Product type	IN
Category	Architectural
Family	Artshape
Subfamily	Artshape Round
Materials	Body is made of thin-walled aluminium profile finish in white. However other different finishes are possible according to RAL colour range.
Optical system	Artshape build-in highly efficient LED light sources. Luminaire offers various options of luminous flux and colour temperature are available under request. Emitting Surface is made of material with very good light diffusion parameters.
Installation instructions	Luminary has been designed to be suspended (1,5 m suspension set included). Versions for ceiling surface installation are possible on demand.

Pictograms

