




#### Dimensions

Product dimensions (mm)	112 x 112 x 60
Drilling hole (mm)	95 x 95

#### Scheme

#### Scheme

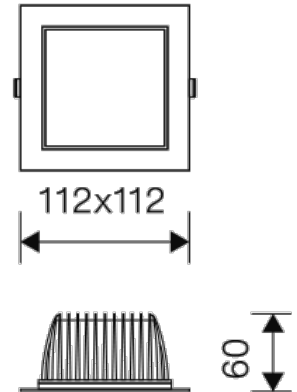

### BERYL SQ 1380 55° E 33 IP54/20 830

#### DESCRIPTION

Luxiona square fix downlight from the TROLL family Beryl SQ. Downlight to be used as general indoor lighting for offices, hospitals commercial areas or residential & contract spaces. Downlight designed for ceiling recessed installation. Luminaire body built in die-cast aluminium with matt polycarbonate frontal diffuser with finish in White. Luminaire has a degree of isolation vs. environment of IP54/20. Luminaire adds in a polycarbonate opal diffuser plus a high purity aluminium reflector with a beam angle of 55°. Luminaire adds in a 10 W LED source with colour temperature of 3000K, Colour reproduction higher than 80% and a chromatic dispersion lower than 3 SMDC. Fixture has n output flux of 1222 Lm, with an efficiency of 101,85 Lm/W and a total consumption of 12 W. The average life for the luminaire is (h) 50000 [L70B10]. Luminaire built-in an Electronic Control Gear fed at 220...240V 50/60Hz.

Item code	11.2046.3128.33
Product type	Indoor Lighting
Category	Recessed Downlights
Family	Beryl
Subfamily	Beryl SQ
Materials	Luminaire body built in die-cast aluminium with matt polycarbonate frontal diffuser with finish in White.
Optical system	Luminaire adds in a polycarbonate opal diffuser plus a high purity aluminium reflector with a beam angle of 55°.
Installation instructions	Downlight designed for ceiling recessed installation.

#### Product

Real power (W)	12
Real luminous flux (Lm)	1222
Luminous efficiency (Lm/W)	101,85
Beam angle (°)	55
Life time (h)	50000 (L70B10)
IP	IP54/20
IK	IK08
Electrical class insulation	Class 2
Operating temperature	from -20°C to 35°C
Electrical feeding	220..240V, 50/60Hz
Colour (RAL)	White(9010)
Energy efficiency class	A+

#### Control gear

Control gear included	Yes
Control gear	Electronic Control Gear
Power Factor	0,98
Flicker Free	Flicker Free

#### Light source

#### Light source included

Light source	Led
Type of LED	CoB
Nominal power (W)	10
Nominal luminous flux (Lm)	1380
Colour temperature (K)	3000

Colour consistency (SDCM) 3

CRI 80

Photometry

Photometry

